

MARS

HOMOGENEOUS VINYL
PROFESSIONAL



68505J



68506J



68501J




68513J



68528J



68511J

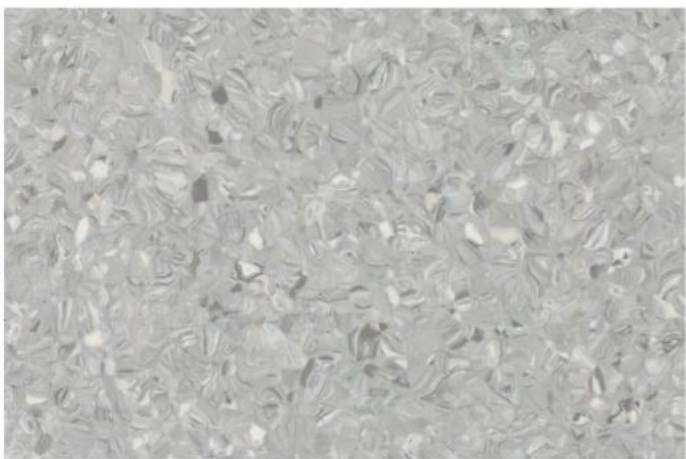


68525J



68526J



68529J

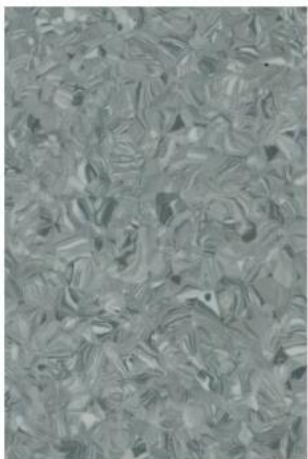

68527J



68530J



Environment friendly
安全环保



Waterproof
防水



Anti-slip
防滑



Easy-care
保洁方便




Comfortable feel feeling
脚感舒适



Fire retardant
防火



Acoustic
隔音

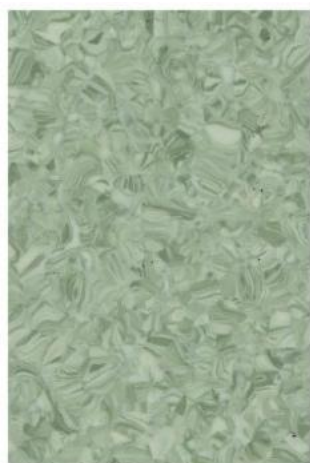

68521J




68522J




68523J




68518J

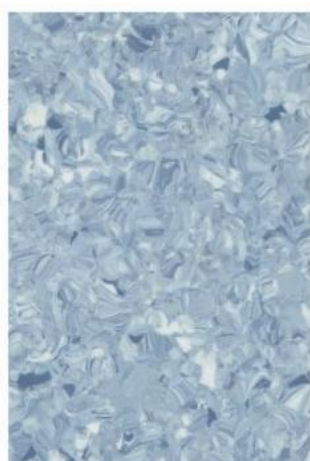

68515J

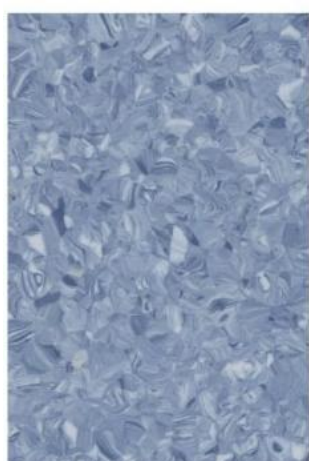

68516J

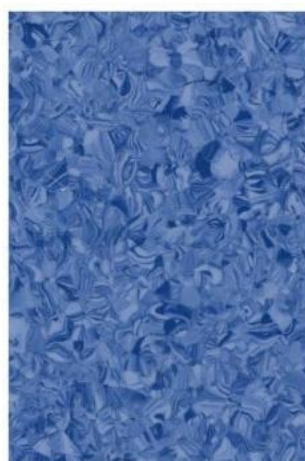

68519J



68517J



68512J



68508J



68507J



68509J



2.0mm × 2m × 20m



68502J



68503J



68520J




68510J



Product structure diagram

- ①
- UV treatment
- ②
- Homogeneous flooring

- High performing flexible homogeneous multipurpose flooring
- Directional design,The decorative effect is more flexible
- Densely compacted surface for improved mar-resistance and Anti pollution performance
- Special maintenance treatment;ease of maintenance
- Special formulation for improved anti-bacterial and anti-mildew

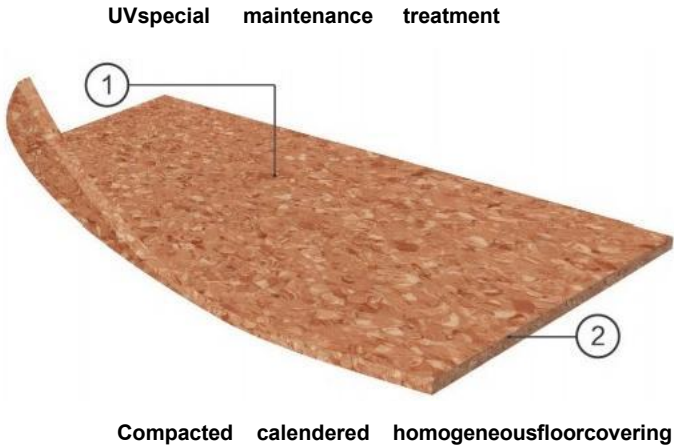

DESCRIPTION	STANDARD	Unit	BESULT
Total thickness	EN 428	mm	2
Width /Length of sheet	EN 426	m	2/20
Weight	ISO23997-EN 430	g/m²	3050
Fire rating	GB8624		B-S1. t0
Electrical resistance	EN 1815	kv	≤2
Slip resistance dry	EN 13893		≥0.3
Slip resistance wet	DIN 51130		R9
Castor chair indentation	EN ISO 24343.1		Suitable
Residual indentation	EN 425	mm	≤0.1
Colour fastness	EN ISO 105-B02		6
Thermal conductivity	EN 12667	w/m, k	0.078
Dimensional stability	ISO 23999-EN434	%	≤0.4
Curling	EN434	mm	≤8
Chemical product resistance	EN 423		0 Not affected
Toxic testing	GB18586		Suitable
Formaldehyde emission	EN 717-1		N.D
Anti-bacterial	ISO 22196		Anti bacterial rate 1
Sound-absorbing	EN ISO 717/2		+4dB



