

A large, circular water splash graphic with a blue and white color scheme, centered on the page. The splash has a textured, bubbly appearance with water droplets radiating outwards.

MERCURY NEO
HOMOGENEOUS VINYL

PROFESSIONAL

www.tkfloor.net

MERCURYNEO
COMMERCIAL
HOMOGENEOUS VINYL



3614 Lily Petal



3621 Tan



3619 Stars Sand



3616 Red gray



3617 Burnt Umber



3613 Stardust



3612 Midnight Grey



3615 Carbon Gray

MERCURYNEO

COMMERCIAL
HOMOGENEOUS VINYL



3629 Tabac Grey



3622 Gansu Powder



3620 Coffee Chips



3618 Natural Cotton

Warm



3623 Lime Green




3610 Golden Yellow

MERCURYNEO


COMMERCIAL
HOMOGENEOUS VINYL



3602 Mild Green

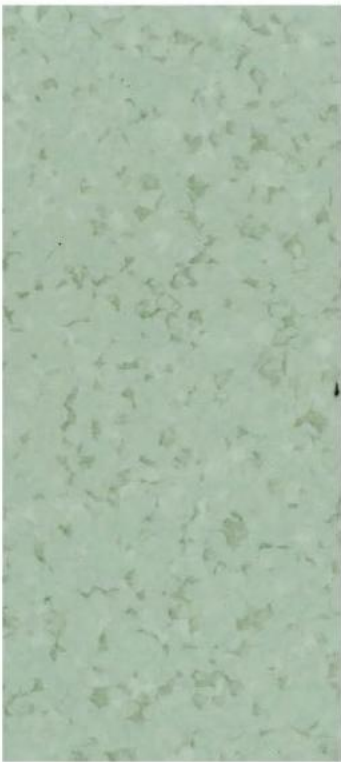

3604 Bamboo

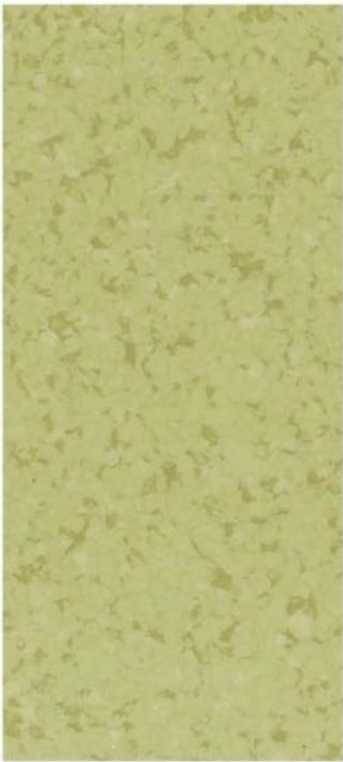

3601 Antique Green



3624 Leat Green


Power




3625 Frog Green

MERCURYNEO


COMMERCIAL
HOMOGENEOUS VINYL

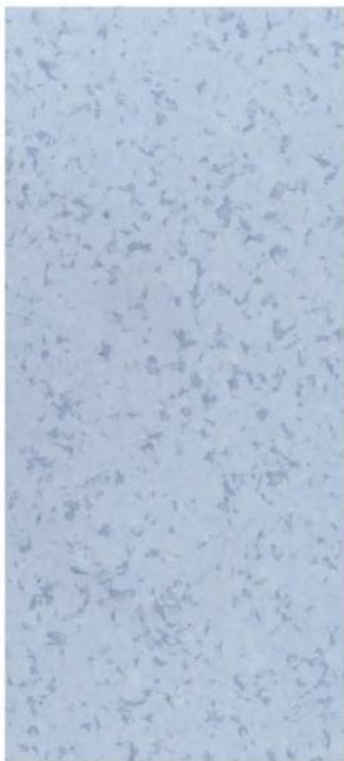


3603 Eternal

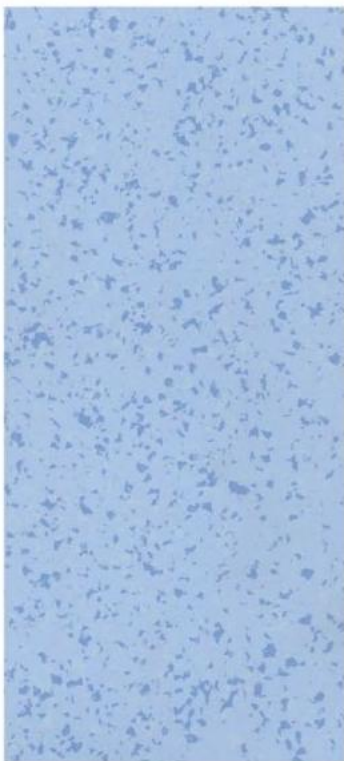

3628 Freesia

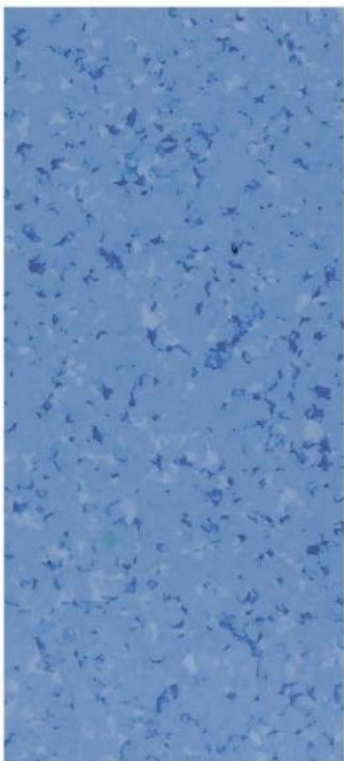


3605 Sky Blue

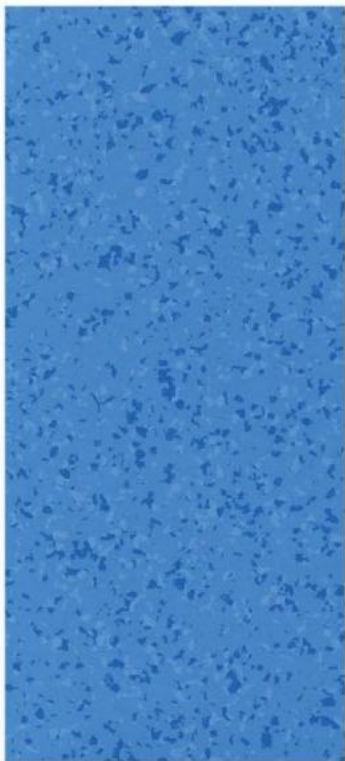


3630 Ink Blue

Quiet

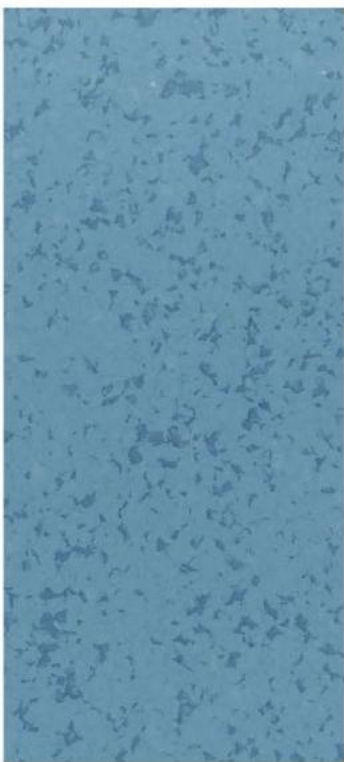

3606 AutumnBlue

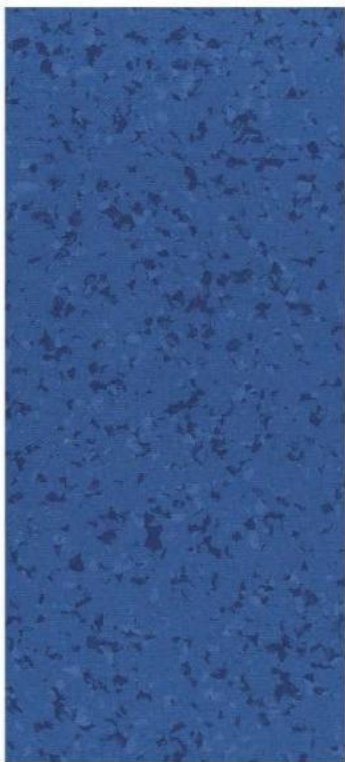


3607 Dark Blue

MERCURY NEO

COMMERCIAL
HOMOGENEOUS VINYL



3626 Pink Hu

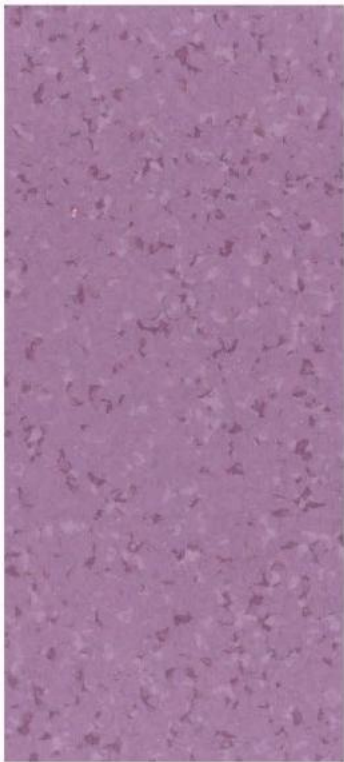

3608 Violet




3627 Cranberry Red



3609 Blazing



3611 Deep Space





MERCURY NEO



ND0 INDOOR AIR QUALITY 室内空气质量

Lower emissions
更低的VOC排放量
Floorscore certified
Floorscore 认证

CE certified
CE 认证
No formaldehyde emission
不含甲醛



RECYCLABILITY 可循环

100% recyclable product
产品100%可回收



RECYCLED CONTENT 成分环保

100% REACH compliant recycled content
100% 符合 REACH 规定




WELLNESS 健康

Antibacterial activity
抗菌活性 > 99%
抗菌率 > 99%

Product structure diagram

- ① **PUR treatment**
- ② **Homogeneous flooring**

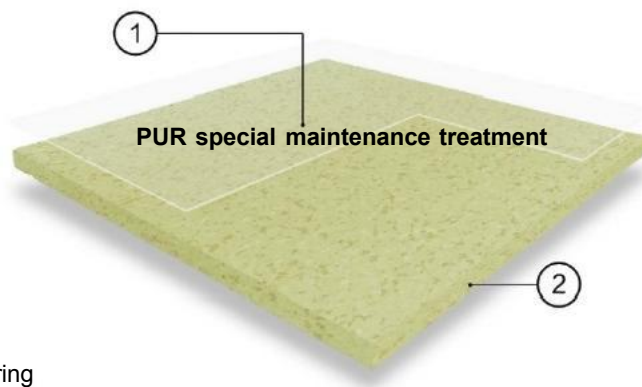

- High performing flexible homogeneous multipurpose flooring
- The non-directional design of the product patten makes the decorative effect more flexible and diverse
- Densely compacted surface for improved mar-resistance and Anti pollution performance
- Special maintenance treatment;ease ot maintenance
- Special formulation for improved anti-bacterial and anti-mildew

Compacted calendered homogeneous floorcovering

Test items	Standard	Unit	RESUL T
Thickness	SO 24346-EN428	mm	2~3
Weigh	ISO 23997-EN 430	g/m ²	2850
Width	SO 24341-EN 426	m	2
Length	ISO 24341-EN 426	m	20
Fire resistance	GB8624		B-S1. t0
Electrical resistance	EN1815	kv	≤2
Slip resistance dry	EN13893		≥0.3
Slip resistance wet	DIN51130		R9
Abrasion group	EN660-2		T
Abrasion resistance	EN660-2	mm ³	≤2
Castor chair resistance	EN425		suitable
Residual indentation	EN433	mm	≤0.1
Colour fastness	SO 105-B02		≥6
Thermal conductivity	EN 12267	w/m. k	0.078
Dimensional stability	SO 23999-EN434	%	≤0.4
Curling	EN434	mm	≤8
Chemical products resistance	EN423		0 Not affected
Toxic testing	GB18586		suitable
Formaldehyde emission	EN717-1		N.D
Anti-bacterial	ISO 22196		Anti baacterial rate I
Sound-absorbing	EN IA0717/2		+4dB